


Standard, Multi-Purpose, Thru-Bolted Square Profile Vision Lite for Up to 1/4" Thick Glazing

SPECIFICATIONS:

Material:	18 gauge CRS frame. Min Size 3" x 3", Max 60" x 104". See Fire Rating Below.
Construction:	1-1/4" trim with radius corners, mitered and welded. Countersunk mounting holes on both sides.
Door:	For 1-3/4" door. Door cutout = order size.
Fasteners:	#8 x 32 flathead phillips head thrubolts with blank heads one side to match finish.
Powder Coat Finishes:	___ (B) Mineral Bronze (standard color) ___ (G) Gray Primer ___ (BK) Black ___ (FBK) Flat Black ___ (W) White ___ (SB) SC Beige ___ (SI) Silver ___ (R) Red ___ (S) Sand ___ (AB) AMS Beige ___ (GH) Gray Hammertone View Colors Online
Glass:	3/16" - 1/4" glazing to be ordered separately from Glazing Section of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 1" under rough opening size. <u>Glass size is 1/4" under order size.</u> Fire-Rated Air Louvers Glazing to fit this vision frame: WS, PPF.
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure.

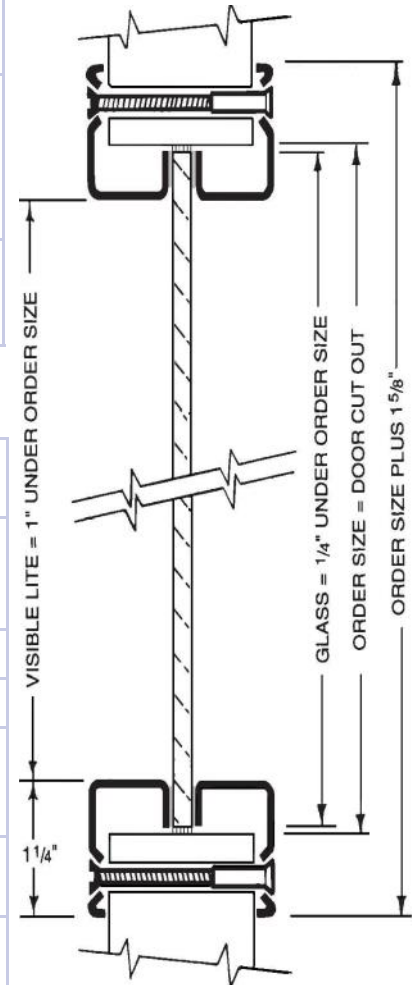

OPTIONS AT ADDITIONAL COST:



UBC 7-2 Installation:	___ Additional intumescent tape for Positive Pressure UL10C 20 minute combustible core wood doors installation. See detailed installation instructions.
Finishes & Materials:	___ (S) 18 Gauge Stainless Steel: #4 Finish. ___ (G) Galvanized Sheet for Exterior Applications. ___ (E) Electro Zinc Plating for Maximum Corrosion Resistance.
Fasteners:	___ Torx ___ Other: _____
Mullions:	Factory welded to vision lite & painted. See Mullions Page in this section to order.
Custom:	PAK, smaller or larger sizes. Leadlined. Please consult Customer Service for Special Orders. See Page 14 for Custom Shapes. See Page 9 for Round, Half-Round & Radius Frames in this Catalog.
Privacy Door:	VLPVC 16 gauge door on continuous hinges welded to vision lite. Minimum size 4" x 4", max size 60" x 60". See Privacy Options Tab.
Privacy Screen:	Add the New Privacy Screen to This Vision Lite— See Web Page for Details

Order Format: VLF

Option S,G,EG W H Color

Example: VLF 1212FBK

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

	Distributor:	Width: ___ x Height: ___
	Architect:	Quantity:
	Contractor:	Model:
	Project:	Date: ___ Version: ALPDS1512

800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM FAX: 952-835-2218

VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING • © ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015
 MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE