



Security Vision Frame With Security Grille Each Side of Glass

**SPECIFICATIONS:**

<b>Material:</b>	18 gauge CRS frame. Min size 4" x 4", Max 60" x 72". See Fire Rating Below.
<b>Grille:</b>	12 gauge CRS with 13/16" square openings 1" on center.
<b>Construction:</b>	Mitered and welded corners, countersunk mounting holes both sides, security grille welded to frame.
<b>Powder Coat Finishes:</b>	___ (B) Mineral Bronze (standard color) ___ (BK) Black ___ (FBK) Flat Black ___ (W) White ___ (SB) SC Beige ___ (SI) Silver ___ (R) Red ___ (S) Sand ___ (AB) AMS Beige ___ (G) Gray Primer ___ (GH) Gray Hammertone <a href="#">View Colors Online</a>
<b>Door:</b>	For 1-3/4" door. Door cutout = order size.
<b>Fasteners:</b>	#8 x 32 Phillips head thru bolts with blank head one side to match finish.
<b>Glass:</b>	3/16" - 1/4" glazing to be ordered separately from <b>Glazing Section</b> of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 1" under rough opening size. Glass size is 1/4" under order size. <b>Fire-Rated Air Louvers Glazing to fit this vision frame: WS, PPF</b>
<b>Fire-Rating, Testing &amp; Listings:</b>	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure.

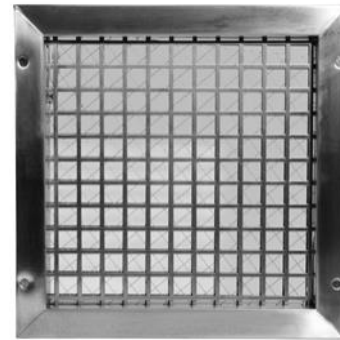

VLF-SG-S in Optional Stainless Steel Finish

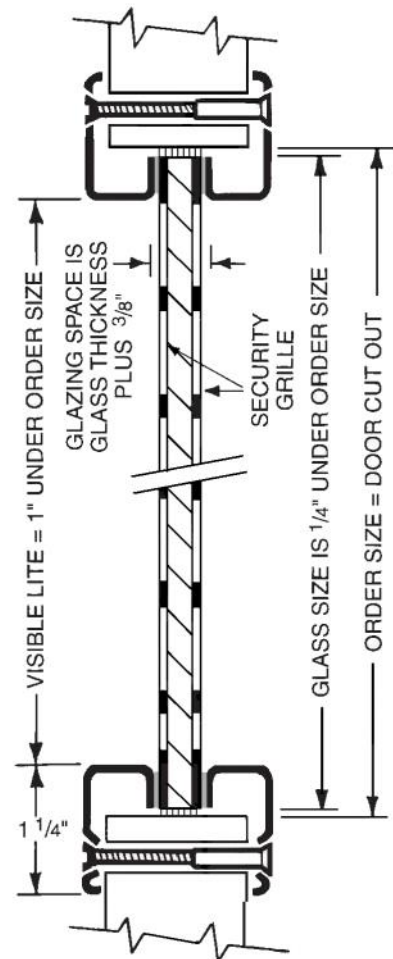

**OPTIONS AT ADDITIONAL COST:**



<b>UBC 7-2 Installation:</b>	___ Additional intumescent tape for <b>Positive Pressure UL10C</b> 20 minute combustible core wood doors installation. See detailed installation instructions.
<b>Finishes &amp; Materials:</b>	___ (S) 20 Gauge Stainless Steel: #4 Finish. ___ (G) Galvanized Sheet for Exterior Applications. ___ (E) Electro Zinc Plating for Maximum Corrosion Resistance.
<b>Fasteners:</b>	___ Torx ___ Other: _____
<b>Privacy Screen:</b>	Add the New Privacy Screen to This Vision Lite— <a href="#">See Web Page for Details</a>
<b>Custom:</b>	Smaller or larger sizes, leadlined. Consult Customer Service.

Order Format: VLF-SG

Option S,G,E    W    H    Color

Example: VLFSG 1212 AMS

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

	<b>Distributor:</b> _____	<b>Width:</b> _____ <b>x Height:</b> _____
	<b>Architect:</b> _____	<b>Quantity:</b> _____
	<b>Contractor:</b> _____	<b>Model:</b> _____
	<b>Project:</b> _____	<b>Date:</b> _____ <b>Version:</b> ALPDS1512

800-554-6077    [QUOTES@ACTIVARCPG.COM](mailto:QUOTES@ACTIVARCPG.COM)    [ORDERS@ACTIVARCPG.COM](mailto:ORDERS@ACTIVARCPG.COM)    [SALES@ACTIVARCPG.COM](mailto:SALES@ACTIVARCPG.COM)    FAX: 952-835-2218

VISIT [WWW.ACTIVARCPG.COM](http://WWW.ACTIVARCPG.COM) FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING • © ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015  
MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE