




This Adjustable Z-Blade Louver with Fusible Link is Ideal for Use in Fire Doors up to 1-1/2 Hour Rating. Ideal for Installation in Existing Door Cutouts.

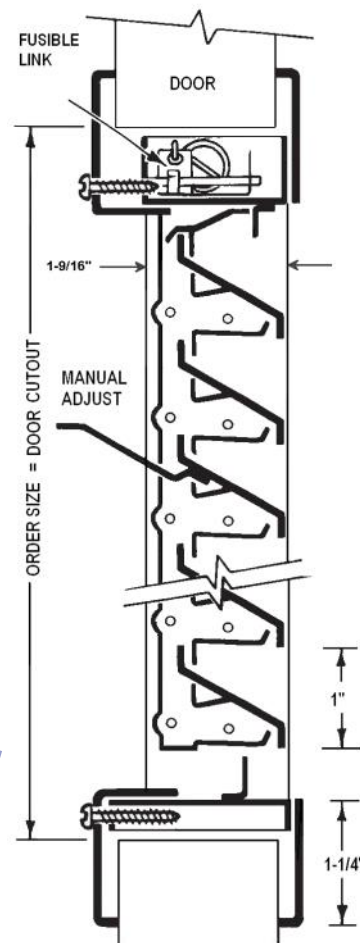

**SELF-ATTACHING FRAME**

**SPECIFICATIONS:**

|                              |  |
|------------------------------|--|
| <b>Material:</b>             | 18 gauge (.048") CRS frame. Min size 10" x 6", Max 24" x 24".  |
| <b>Construction:</b>         | <b>Louver:</b> Z-blade louvers riveted to operating bar and frame at 1" intervals to welded 1-9/16" deep frame. Mechanical stop 5/8" x 3/8" x 16 ga. (.048") holds blades open.<br><b>Frame:</b> Mitered and welded corners; screws fastened through prepared frame into louver core leaving corridor side of frame free of fasteners. |
| <b>Operation:</b>            | Adjustable blades of 16 gauge (.059") CRS pivot on cadmium-plated steel rivets. The blades are operated by a manual adjusting lever. A spring loaded fusible link mechanism is incorporated into the design. Upon melting of the link at 165° F, the action bar is actuated, thereby closing and locking all of the blades.            |
| <b>Door :</b>                | For 1-3/4" steel or composite doors. <b>Door cutout = order size.</b>  |
| <b>Fasteners:</b>            | #8 x 3/4" Phillips flathead screws to match finish.  |
| <b>Powder Coat Finishes:</b> | ___ (B) Mineral Bronze (standard color)<br>___ (G) Gray Primer ___ (BK) Black ___ (FBK) Flat Black<br>___ (W) White ___ (SB) SC Beige ___ (SI) Silver<br>___ (S) Sand ___ (AB) AMS Beige ___ (R) Red<br>___ (GH) Gray Hammertone <b>Color Samples Online</b>   |
| <b>Free Flow Area:</b>       | 45% free area.   |

**OPTIONAL FEATURES AT AN ADDITIONAL COST:**

|                                  |   |
|----------------------------------|---|
| <b>Finishes &amp; Materials:</b> | ___ #4 Stainless Steel finish (S): 18 gauge (.048") frame and 16 gauge (.059") louver blades<br>___ (E) Electro Galvanized for corrosion resistance & exterior use. |
| <b>Fasteners:</b>                | ___ Torx ___ Other: _____   |
| <b>Screen:</b>                   | ___ Insect or Bird Screen in aluminum frame, attached to corridor side.   |
| <b>Custom:</b>                   | Custom sizes, other door thickness. Contact Customer Service.   |

**Order Format:** 1900A \_\_\_\_\_  
**Example:** 1900A 1212SA      Option S,E      W      H      Color

**LISTINGS & RATINGS:**



**Fire Ratings with UL & WHI Classification Marks Tested & Listed for UL10(b), and classified in accordance with UBC7-2-94, ASTM E152, CAN/ULC S104, NFPA 252. Install in accordance with NFPA80.**

**Model 1900A** is Rated for use in fire doors up to 1-1/2 hour rating. Louver size shall not exceed maximum of 576 sq. inches, 24"W and 24" H. The minimum width and height shall not be less than 10" and 6", respectively. Louvers may be provided for classified hollow metal type and composite type fire doors. **Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards. Louver frame will be labeled with Listing mark.**

**STOCK ITEM— SEVERAL SIZES OF 1900A IN STOCK FOR NEXT DAY SHIPMENT FROM MANY OF OUR WAREHOUSES**

|  |                           |  |
|--|---------------------------|--|
|  | <b>Distributor:</b> _____ | <b>Width:</b> _____ <b>x Height:</b> _____   |
|  | <b>Architect:</b> _____   | <b>Quantity:</b> _____                       |
|  | <b>Contractor:</b> _____  | <b>Model:</b> _____                          |
|  | <b>Project:</b> _____     | <b>Date:</b> _____ <b>Version:</b> ALPDS1512 |

800-554-6077      [QUOTES@ACTIVARCPG.COM](mailto:QUOTES@ACTIVARCPG.COM)      [ORDERS@ACTIVARCPG.COM](mailto:ORDERS@ACTIVARCPG.COM)      [SALES@ACTIVARCPG.COM](mailto:SALES@ACTIVARCPG.COM)      FAX: 952-835-2218

VISIT [WWW.ACTIVARCPG.COM](http://WWW.ACTIVARCPG.COM) FOR THE MOST UPDATED PRODUCT INFORMATION © ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015  
 MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE