


Stormproof Aluminum "Z" Blades Incorporate a Water Baffle, Suitable for Exterior Applications Where Weather Protection is Required. Available with Insect or Bird Screen.

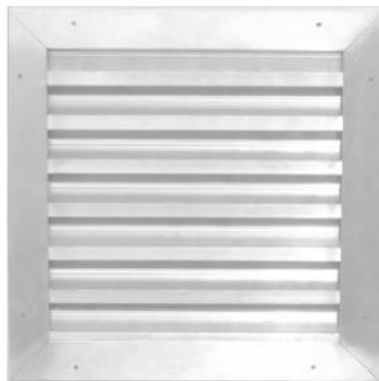

SPECIFICATIONS:


Material:	.063" thick 6063-T5 extruded aluminum. Min size 8" x 8", Max 36" x 80". Multiple sections can be combined for larger sizes
Construction:	Louver: "Z" blades with water baffle at 1-5/8" intervals are screwed into the 1-1/4" deep frame. Non-vision design. 1400A Frame: 1/2" trim with reinforced mitered corners. Louver frame is screwed into door from 2 sides.
Door:	_____ 1 3/8"-1 3/4" - Any Style. Door cutout = order size.
Mounting Options:	_____ Select one mounting option from table below.
Fasteners:	#8 x 3/4" Hex head screws to match finish.
Finish:	Mill finish aluminum.
Free Flow Area:	35% free area.

OPTIONAL FEATURES AT AN ADDITIONAL COST:

Fasteners:	___ Torx ___ Other: _____
Screen:	___ 18 x14 mesh insect screen installed in roll-formed aluminum frame. ___ aluminum ___ bronze ___ fiberglass ___ stainless ___ Bird Screen.
Custom:	Custom sizes, other door thickness, other options; Contact Customer Service.

Order Format:	1400 _____
Example: 1400C 1212	A,CORE,C _____ W _____ H _____

1400A
Mounting
Shown in
Photo and
Drawing

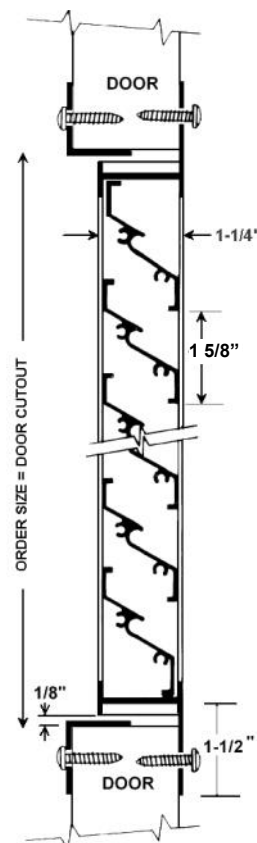

DOOR MOUNTING OPTIONS - SELECT ONE	
<p>1400A: (Shown Above) Basic blade unit with flanged frame welded to face (corridor) side and separate removable flanged frame on opposite side; frame adjustable to fit any door thickness from 1-3/8" to 1-3/4".</p>	
<p>1400 CORE: Basic blade unit only; for interior doors; or as transom louver held in place with wood or metal moulding (furnished by others); any door size.</p>	
<p>1400C: Basic blade unit with single flanged frame welded to face (corridor) side. Wood or metal moulding (by others) used on opposite side; fits any size door.</p>	

 	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Model: _____
	Project: _____	Date: _____ Version: ALPDS1512
<p>800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM FAX: 952-835-2218</p> <p>VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION © ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015</p> <p>MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE</p>		