




Inverted "Y" Blades with Security Grille Meets up to 350 ft lb Impact Rating for Severe Windstorm Rating. Electro-Galvanized Finish Provides Weatherproof Finish for Exterior Applications.

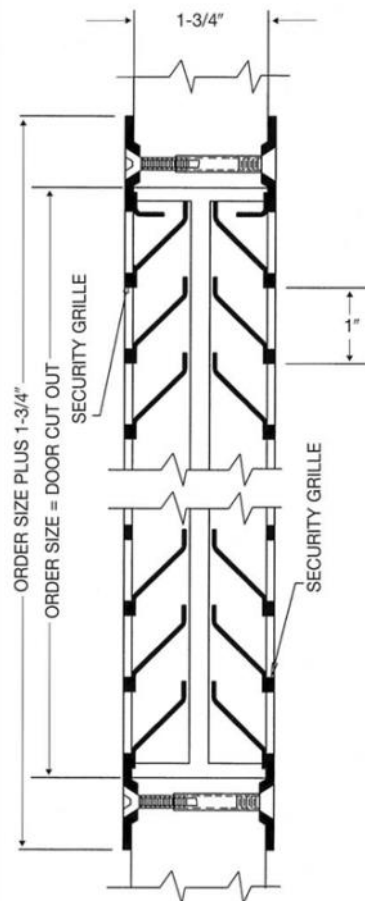

**SPECIFICATIONS:**

<b>Material:</b>	18 gauge CRS frame and blades; 12 gauge CRS security grille. Minimum size 6" X 6", Maximum size 24" x 64"
<b>Construction:</b>	<b>Louvers:</b> 2 rows of Inverted, split "Y" blades with 1" blade spacing are attached to welded frame with by interlocking construction. <b>Non-vision design.</b> <b>Security Frame:</b> Security grille is welded to on interior and exterior of louver with 13/16" square openings 1" on center. Thru-bolted to door.
<b>Door:</b>	1-3/4". <b>Door cutout = order size.</b>
<b>Fasteners:</b>	#8-32 Phillips head thru-bolts with blank head one side.
<b>Finish:</b>	Standard Electro-Galvanized base with Powder Coat Finish. ___ (B) Mineral Bronze (standard color) ___ (G) Gray ___ (BK) Black ___ (FBK) Flat Black ___ (W) White ___ (SB) SC Beige ___ (SI) Silver ___ (S) Sand ___ (AB) AMS Beige ___ (R) Red ___ (GH) Gray Hammertone <b>Color Samples Online</b>
<b>Free Flow Area:</b>	40% free area.

**OPTIONAL FEATURES AT AN ADDITIONAL COST:**

<b>Finishes &amp; Materials:</b>	___ #4 finish Stainless Steel (S): 18 gauge frame & blades with 12 gauge grille.
<b>Fasteners:</b>	___ Torx ___ Other: _____
<b>Screen:</b>	___ 18 -14 mesh insect screen installed in roll formed aluminum frame ___ Aluminum ___ bronze ___ fiberglass ___ stainless ___ Bird Screen
<b>Custom:</b>	Custom sizes, other door thickness, other options; Contact Customer Service.

**LISTINGS & RATINGS:**



**1500AHRC Listed Severe Windstorm Approved Louver**

Tested in Accordance with:  
 ASTM E330, ASTM E1996, ANSI A250.13  
 TAS 203, 201, 202, ASTM E 1886  
 Impact (ft lb) 350  
 DP Rating (PSF) 60  
 Florida Building Code Approval File # FL13341

**Order Format:** **1500AHRC**  
**Example: 1500AHRC 2464B**      Option S      W      H      Color

**STOCK ITEM**  
**FROM FL WAREHOUSE—**  
**FOR NEXT DAY SHIPMENT**

  	<b>Distributor:</b>	<b>Width:</b> ___ x <b>Height:</b> ___
	<b>Architect:</b>	<b>Quantity:</b>
	<b>Contractor:</b>	<b>Model:</b>
	<b>Project:</b>	<b>Date:</b> <b>Version:</b> ALPDS1512
800-554-6077 <a href="mailto:QUOTES@ACTIVARCPG.COM">QUOTES@ACTIVARCPG.COM</a> <a href="mailto:ORDERS@ACTIVARCPG.COM">ORDERS@ACTIVARCPG.COM</a> <a href="mailto:SALES@ACTIVARCPG.COM">SALES@ACTIVARCPG.COM</a> Fax: 952-835-2218 VISIT <a href="http://WWW.ACTIVARCPG.COM">WWW.ACTIVARCPG.COM</a> FOR THE MOST UPDATED PRODUCT INFORMATION © ACTIVAR CONSTRUCTION PRODUCTS GROUP, Inc 2015 MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE		